


Straight Rollers ø48.6

3 phase



Motor
Roller

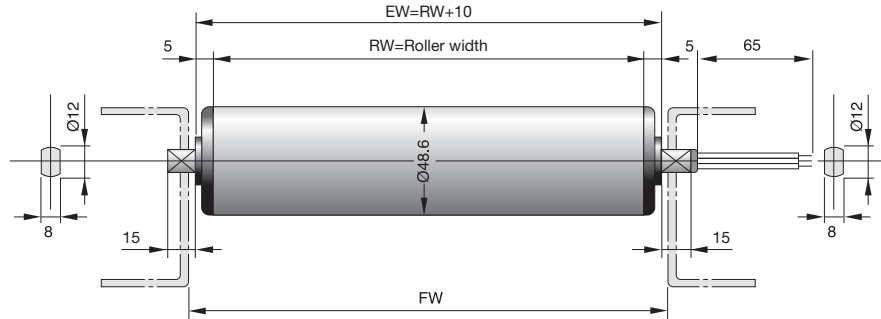

Straight roller dimensions/weight

RW=Roller width (FW-12)	265	300	400	500	600	700	800
Width inside the frame (FW)	277	312	412	512	612	712	812
Weight (kg)	1.3	1.3	1.4	1.5	1.7	1.8	1.9
Snap-on shaft	×	○	○	○	○	○	○

Suitable for conveyance of light load (30 kg or less)

200V
50Hz

Model	Speed (m/min.)	Tangential force (N)	Torque (Nm)	Input current (A) No load	Input current (A) Starting	Input (W)
48S 4-[]-3-200	3.4	79	1.9	0.05	0.1	17
48S 6-[]-3-200	5.7	48	1.2			
48S 8-[]-3-200	7.4	40	1.0			
48S10-[]-3-200	10.2	22	0.5			
48S15-[]-3-200	15.9	18	0.4			
48S20-[]-3-200	20.5	13	0.3			
48S25-[]-3-200	25.0	9	0.2			
48S30-[]-3-200	29.6	8	0.2			

1N=0.102kgf 1Nm=10.2kgf-cm

200V
60Hz

Model	Speed (m/min.)	Tangential force (N)	Torque (Nm)	Input current (A) No load	Input current (A) Starting	Input (W)
48S 4-[]-3-200	4.0	66	1.6	0.05	0.1	17
48S 6-[]-3-200	6.3	40	1.0			
48S 8-[]-3-200	8.5	31	0.7			
48S10-[]-3-200	12.5	18	0.4			
48S15-[]-3-200	18.8	13	0.3			
48S20-[]-3-200	23.9	11	0.3			
48S25-[]-3-200	29.6	7	0.2			
48S30-[]-3-200	34.1	6	0.1			

1N=0.102kgf 1Nm=10.2kgf-cm