



# Straight Rollers

# Ø57

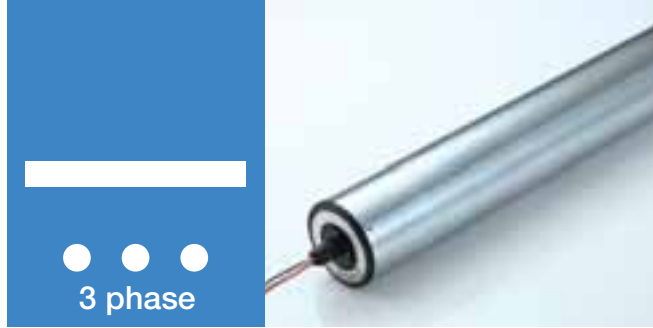

Motor  
Roller

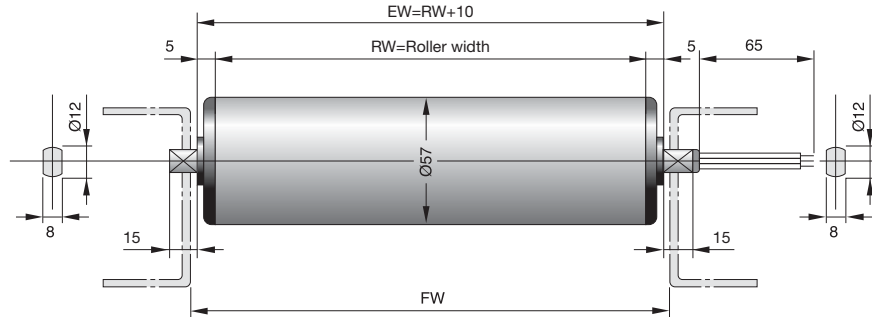

## Straight roller dimensions/weight

RW=Roller width (FW-12)	250	300	400	500	600	700	800	900	1000
Width inside the frame (FW)	262	312	412	512	612	712	812	912	1012
Weight (kg)	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
Snap-on shaft	×	○	○	○	○	○	○	○	○

200V  
50Hz

Model	Speed (m/min.)	Tangential force (N)	Torque (Nm)	Input current (A) No load	Input current (A) Starting	Input (W)
57S 4-[ ]-3-200	4.5	209	6.0	0.12	0.2	23
57S 6-[ ]-3-200	6.5	144	4.1			
57S 8-[ ]-3-200	8.5	104	3.0			
57S10-[ ]-3-200	10.5	82	2.3			
57S13-[ ]-3-200	14.5	62	1.8			
57S15-[ ]-3-200	17.5	52	1.5			
57S20-[ ]-3-200	21.0	38	1.1			
57S25-[ ]-3-200	26.0	31	0.9			
57S30-[ ]-3-200	32.0	25	0.7			
57S35-[ ]-3-200	35.0	22	0.6			
57S45-[ ]-3-200	45.0	17	0.5			

1N=0.102kgf 1Nm=10.2kgf-cm

200V  
60Hz

Model	Speed (m/min.)	Tangential force (N)	Torque (Nm)	Input current (A) No load	Input current (A) Starting	Input (W)
57S 4-[ ]-3-200	5.0	174	5.0	0.11	0.2	22
57S 6-[ ]-3-200	7.5	120	3.4			
57S 8-[ ]-3-200	10.0	87	2.5			
57S10-[ ]-3-200	12.0	68	1.9			
57S13-[ ]-3-200	17.5	49	1.4			
57S15-[ ]-3-200	20.0	43	1.2			
57S20-[ ]-3-200	24.0	32	0.9			
57S25-[ ]-3-200	30.0	26	0.7			
57S30-[ ]-3-200	36.0	21	0.6			
57S35-[ ]-3-200	42.0	18	0.5			
57S45-[ ]-3-200	54.0	14	0.4			

1N=0.102kgf 1Nm=10.2kgf-cm