
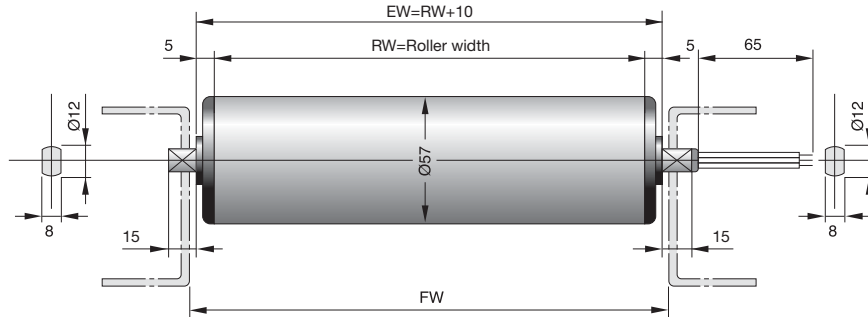


Straight Rollers

∅57

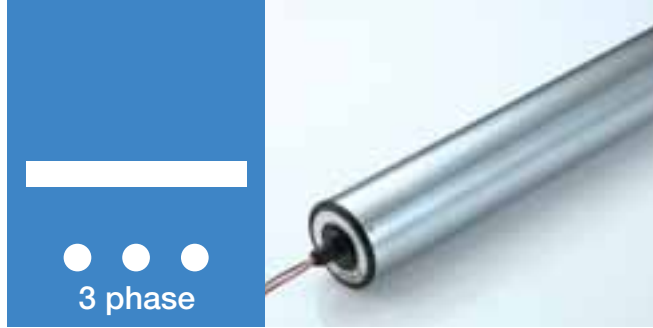

Straight roller dimensions/weight

RW=Roller width (FW-12)	250	300	400	500	600	700	800	900	1000
Width inside the frame (FW)	262	312	412	512	612	712	812	912	1012
Weight (kg)	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
Snap-on shaft	×	○	○	○	○	○	○	○	○

220/380/
415V
50Hz

Model	Speed (m/min.)	Tangential force (N)	Torque (Nm)	Input current (A)		Input (W)
				No load	Starting	
57S 4-[]-3-[]	4.5	150	4.3	220V 0.1	220V 0.18	220V 20
57S 6-[]-3-[]	6.5	110	3.1			
57S 8-[]-3-[]	8.5	85	2.4			
57S10-[]-3-[]	10.5	65	1.9			
57S13-[]-3-[]	14.5	54	1.5	380V 0.07	380V 0.15	380V 22
57S15-[]-3-[]	17.5	45	1.3			
57S20-[]-3-[]	21.0	33	0.9			
57S25-[]-3-[]	26.0	27	0.8	415V 0.07	415V 0.15	415V 22
57S30-[]-3-[]	32.0	22	0.6			
57S35-[]-3-[]	35.0	19	0.5			
57S45-[]-3-[]	45.0	14	0.4			

1N=0.102kgf 1Nm=10.2kgf-cm

220/380/
480V
60Hz

Model	Speed (m/min.)	Tangential force (N)	Torque (Nm)	Input current (A)		Input (W)
				No load	Starting	
57S 4-[]-3-[]	5.0	130	3.7	220V 0.09	220V 0.18	220V 19
57S 6-[]-3-[]	7.5	90	2.6			
57S 8-[]-3-[]	10.0	65	1.9			
57S10-[]-3-[]	12.0	47	1.3			
57S13-[]-3-[]	17.5	39	1.1	380V 0.06	380V 0.12	380V 20
57S15-[]-3-[]	20.0	34	1.0			
57S20-[]-3-[]	24.0	26	0.7			
57S25-[]-3-[]	30.0	20	0.6	480V 0.06	480V 0.12	480V 20
57S30-[]-3-[]	36.0	16	0.5			
57S35-[]-3-[]	42.0	14	0.4			
57S45-[]-3-[]	54.0	11	0.3			

1N=0.102kgf 1Nm=10.2kgf-cm