



Model selection for pallet conveyance

Standard conditions:


- Roller diameter: 57 or 60.5 mm
- Load weight: 1000 kg or less
- Two MBRs are used for one pallet
(MBR pitch ≤ Pallet length + Conveyor roller pitch)

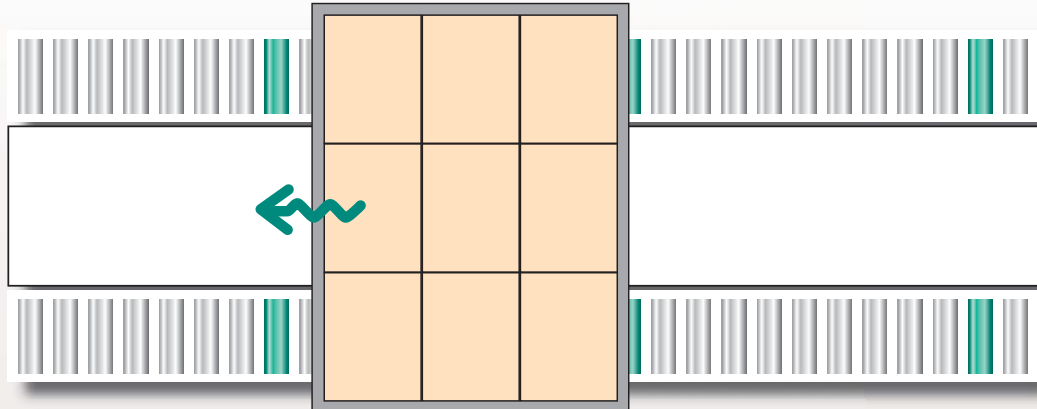

1) Tilting angle 2°

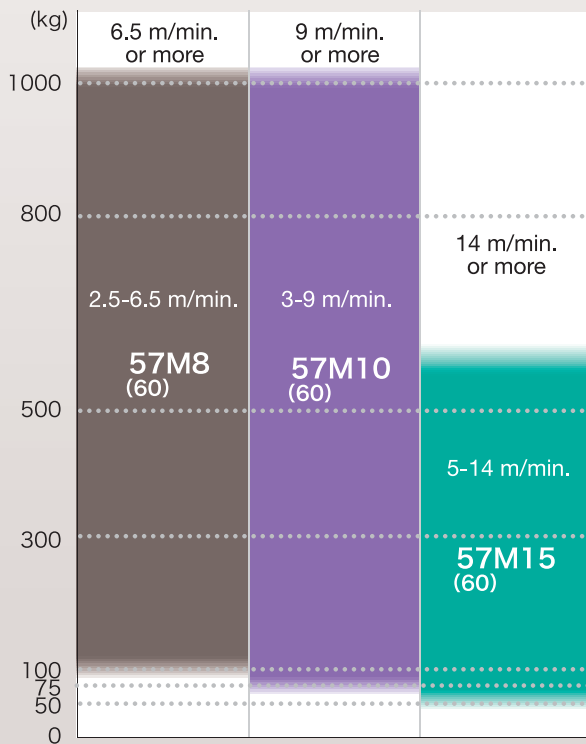

2) Tilting angle 1.5°

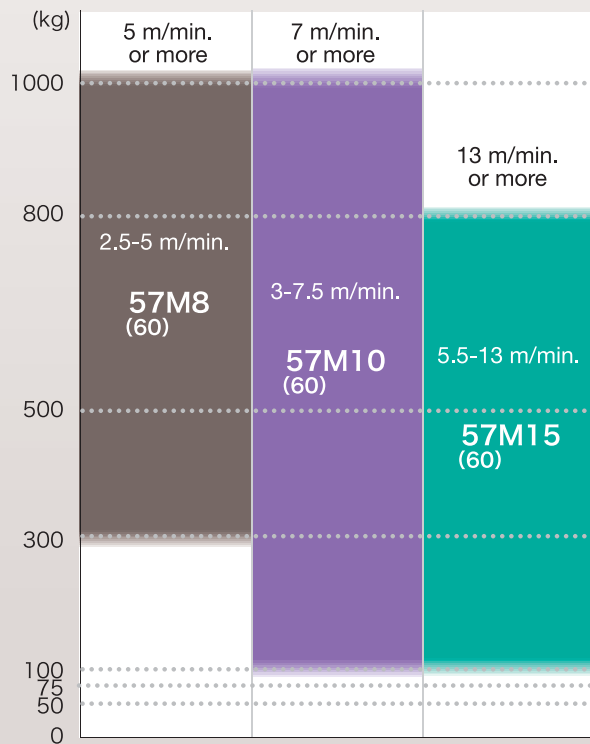

Please consult us for conveying speed and other details.

The above recommendation is based on our test with plastic pallets.

Please note that the best suitable model depends on the material and bottom condition of the pallet.