


ストレートローラー φ60.5

●
単相



Motor
Roller

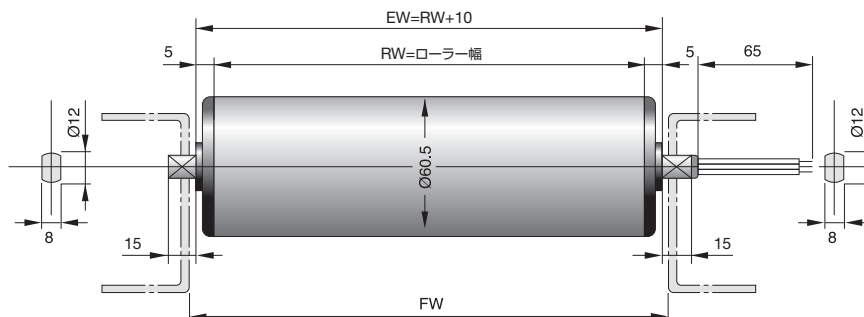

ストレートローラー寸法・重量表

RW=ローラー幅(FW-12)	250	300	400	500	600	700	800
フレーム内寸(FW)	262	312	412	512	612	712	812
重量(kg)	2.7	3.0	3.4	3.9	4.3	4.8	5.2
ワンタッチ取付機構	×	○	○	○	○	○	○

100/110V 50Hz

型式	周速度 (m/分)	接線力 (N)	トルク (Nm)	電流(A) 無負荷	電流(A) 起動	入力電力 (W)	コンデンサー (μF)
60S 4-[]-1-[]	4.2	66	2.0	100V 0.28	100V 0.35	100V 20	100V 5.4
60S 6-[]-1-[]	6.3	43	1.3				
60S 8-[]-1-[]	8.5	33	1.0				
60S10-[]-1-[]	10.0	26	0.8				
60S13-[]-1-[]	14.8	19	0.6				
60S15-[]-1-[]	17.5	16	0.5				
60S20-[]-1-[]	21.2	12	0.4	110V 0.3	110V 0.35	110V 21	110V 5.4
60S25-[]-1-[]	25.4	10	0.3				
60S30-[]-1-[]	31.7	9	0.3				
60S35-[]-1-[]	34.9	8	0.2				
60S45-[]-1-[]	44.4	6	0.2				

1N=0.102kgf 1Nm=10.2kgf-cm

100/110V 60Hz

型式	周速度 (m/分)	接線力 (N)	トルク (Nm)	電流(A) 無負荷	電流(A) 起動	入力電力 (W)	コンデンサー (μF)
60S 4-[]-1-[]	5.3	66	2.0	100V 0.25	100V 0.3	100V 20	100V 5.4
60S 6-[]-1-[]	7.4	43	1.3				
60S 8-[]-1-[]	10.0	33	1.0				
60S10-[]-1-[]	11.6	26	0.8				
60S13-[]-1-[]	18.0	18	0.5				
60S15-[]-1-[]	20.1	16	0.5				
60S20-[]-1-[]	24.3	12	0.4	110V 0.25	110V 0.35	110V 21	110V 5.4
60S25-[]-1-[]	29.6	10	0.3				
60S30-[]-1-[]	37.0	9	0.3				
60S35-[]-1-[]	42.3	8	0.2				
60S45-[]-1-[]	52.9	6	0.2				

1N=0.102kgf 1Nm=10.2kgf-cm