



Model selection for case conveyance

Standard conditions:

- Tilting angle: 3° (52/1000)
- Conveying speed: 7–9 m/min.
- One MBR under the bottom of each load

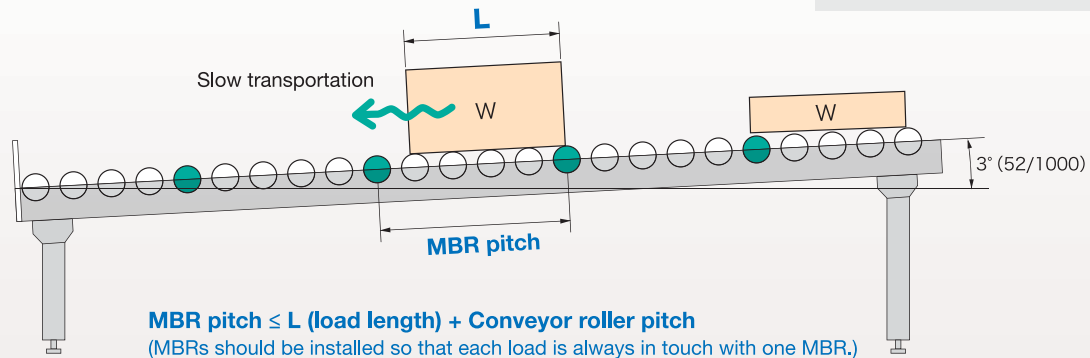

Load weight (kg)

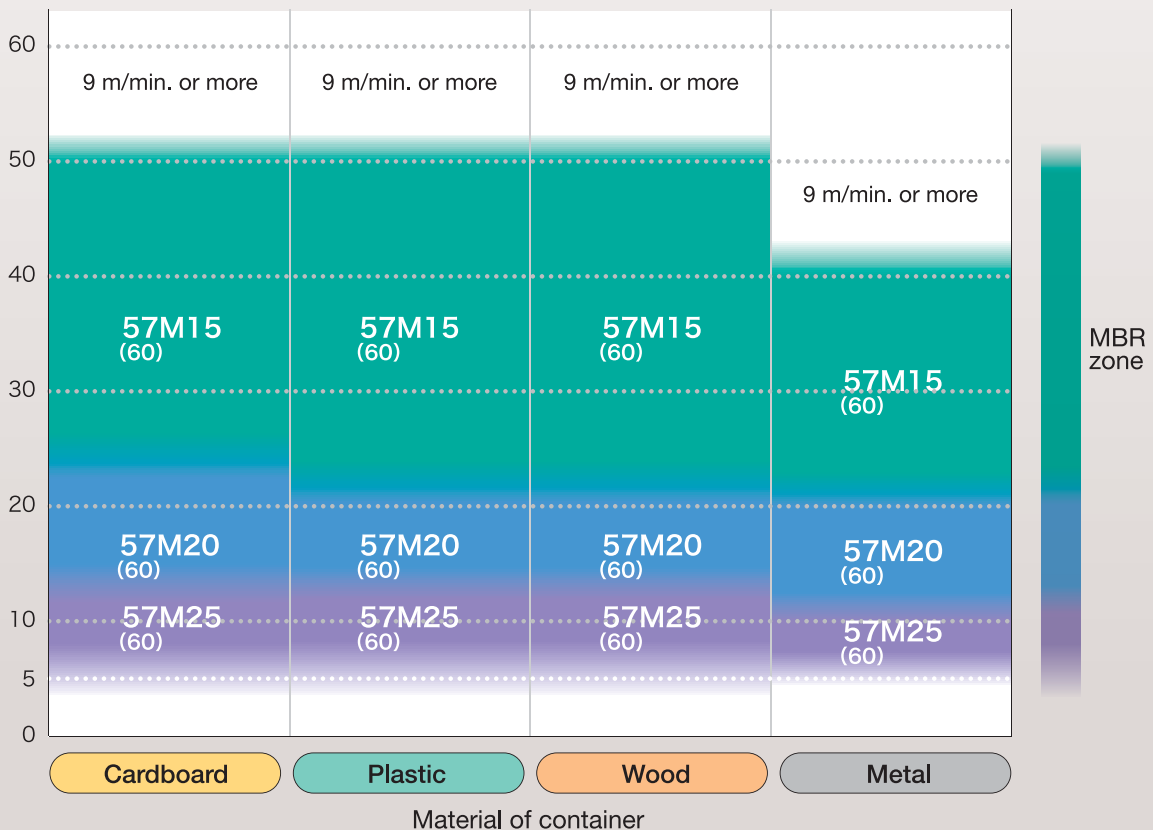

Please consult us for other conditions (angle, speed and weight).

Though recommended models are listed above, please note that the best suitable model varies with the container (load) bottom condition.