

**Form 2** for those who consider the use of MBRs with a wheel conveyor

Phone: +81-790-42-1214

Fax: +81-790-42-0274

Fill in the form about your conveyor system.

Please fill in the form and fax it to us.

●Your company name:

●Phone:

●Representative:

●Fax:

① Tilting angle degrees (1-30 degrees)  
Difference in height mm

② Conveyor (tilted portion) length mm

③ Load bottom size  
Max. W mm × L mm × H mm  
Min. W mm × L mm × H mm

④ Load weight  
Max. kg  
Min. kg


⑤ Load container material (Circle your choice.)  
Cardboard Plastic Wood Metal  
Other ( )

⑥ Speed to approach the slope (See the examples.) m/min. (0-90 m/min.)  
Examples: Drive speed \_\_\_\_m/min.  
Manual start by worker


⑦ Desired conveying speed m/min. or less

Tolerance to impact of collision between loads (Circle your choice.)  
High Medium Low Very low

Medium: Not so strong impact is tolerable.  
Low: Only weak impact is tolerable.

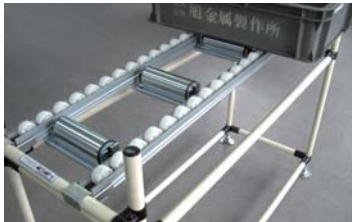


Installation Drawing

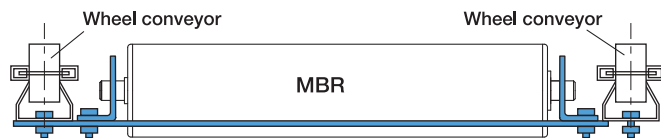

— Mounting hardware supplied by us

Reference 1


Wheel conveyor maker:  
Wheel conveyor model:

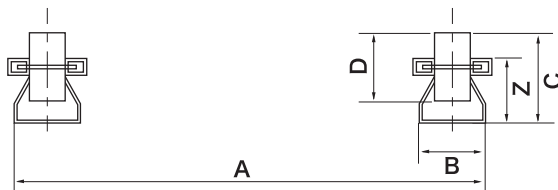

A mm  
B mm  
C mm  
D mm  
Z mm  
P (roller pitch) mm

Reference 2

Wheel conveyor maker:  
Wheel conveyor model:

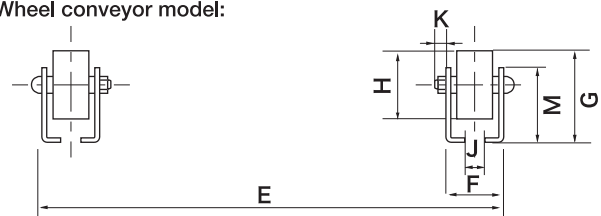

E mm  
F mm  
G mm  
H mm  
J mm  
K mm  
M mm  
P (roller pitch) mm

Other information:

Please give us detailed information about your conveyor system by fax. We will contact you upon receipt of your fax.

For safety, if your current operating conditions are different from the conditions of which you initially informed us, be sure to let us know.