


ストレートローラー φ60.5

三相

Motor
Roller

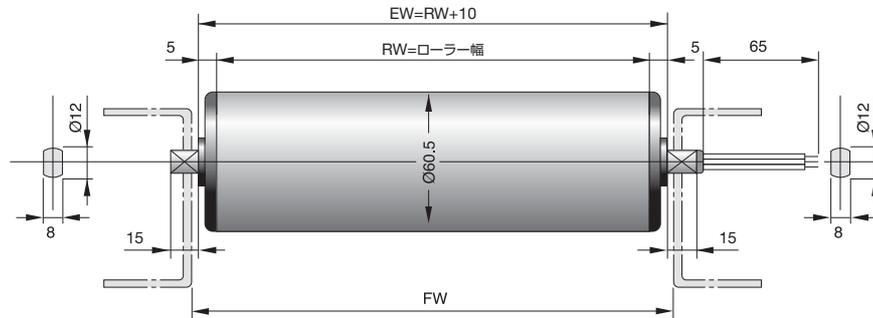

ストレートローラー寸法・重量表

RW=ローラー幅(FW-12)	250	300	400	500	600	700	800
フレーム内寸(FW)	262	312	412	512	612	712	812
重量(kg)	2.7	3.0	3.4	3.9	4.3	4.8	5.2
ワンタッチ取付機構	×	○	○	○	○	○	○

200V
50Hz

型式	周速度 (m/分)	接線力 (N)	トルク (Nm)	電流(A)		入力電力 (W)
				無負荷	起動	
60S 4-[]-3-200	4.8	198	6.0	0.12	0.2	23
60S 6-[]-3-200	6.9	136	4.1			
60S 8-[]-3-200	9.0	98	3.0			
60S10-[]-3-200	11.1	78	2.3			
60S13-[]-3-200	15.3	61	1.8			
60S15-[]-3-200	18.5	49	1.5			
60S20-[]-3-200	22.2	36	1.1			
60S25-[]-3-200	27.5	29	0.9			
60S30-[]-3-200	33.8	24	0.7			
60S35-[]-3-200	37.0	21	0.6			
60S45-[]-3-200	47.6	16	0.5			

1N=0.102kgf 1Nm=10.2kgf-cm

200V
60Hz

型式	周速度 (m/分)	接線力 (N)	トルク (Nm)	電流(A)		入力電力 (W)
				無負荷	起動	
60S 4-[]-3-200	5.3	165	5.0	0.11	0.2	22
60S 6-[]-3-200	7.9	113	3.4			
60S 8-[]-3-200	10.6	82	2.5			
60S10-[]-3-200	12.7	64	1.9			
60S13-[]-3-200	18.5	48	1.5			
60S15-[]-3-200	21.2	41	1.2			
60S20-[]-3-200	25.4	30	0.9			
60S25-[]-3-200	31.7	25	0.7			
60S30-[]-3-200	38.1	20	0.6			
60S35-[]-3-200	44.4	17	0.5			
60S45-[]-3-200	57.1	13	0.4			

1N=0.102kgf 1Nm=10.2kgf-cm